

COMTECH 191 Visual Fault Locator

Introduction:

Comtech 191 series visual fault locator is used for the measurement in single mode or multi-mode fibers. It features a rugged design, a universal connector and an accurate measurement.

Specification:



1mw VFL



10/20/30/50mw VFL

	TM191-1	TM191-10	TM191-20	TM191-30	TM191-50
Wavelength	650nm ± 20nm				
Output Power	> 1mW	> 10mW	> 20mW	> 30mW	>50mW
Dynamic Distance	2~ 5 km	8~12km	12~15km	18~22km	22~30km
Mode	Continuous Wave (CW) and Pulsed				
Fiber Type	SM				
Connector	2.5mm				
Packaging Size	210*73*30				
Weight	150g				
Power Supply	AA * 2				
Operating Temperature	-10 -- +50 °C, < 90%RH				
Storage Temperature	20 -- +60 °C, < 90%RH				

Detailed pictures:



Stable Quality

1-30km Measurement

18 months Warranty

Key Functions;



Up: Bright

Mid: Off

Down: Blink



■ FC Connector




■ SC connector



■ ST connector

Applications:

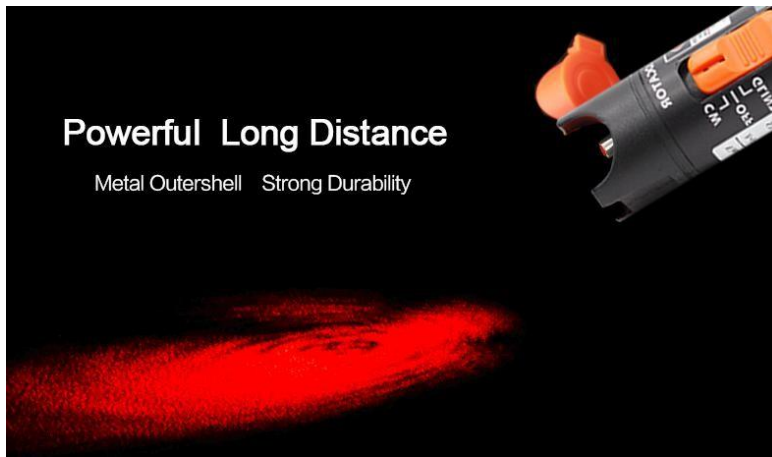

- Telecommunications Engineering and Maintenance
- CATV engineering and maintenance
- Cabling System
- Other fiber-optic project

Packing List



- 1 VFL 2 AA battery X2 3 Manual
4 Carton box 5 Softcase 6 Strap



Please do not look straight into the laser light when using, in order to avoid damage to eyes.