

- Best suitable for SC-UPC/APC adapters or LC Duplex adaptor installation.
- Suitable for OFC below Ø12 terminal and figure 8 type and Ø3 drop cables protecting connection.
- Environmental protection with IP65 rating.
- Can be installed with 1x8 PLC Splitter.
- Suitable for wall mounting or pole mounting for standard installation.
- FDB can be installed for both indoor and outdoor locations.



Part/Model Number **8PCST12C**

8PCST12C	Fiber optic distribution box suitable for indoor use
1 2 3 4 5	
*1 indicate capacity: 02=2 cores, 04=4 cores, 08=8 cores, 012=12 cores...	
*2 indicate adapter style: SC=SC/UPC, SCA=SC/APC...	
*3 indicate splitter: 00=no splitter, 01=1:8 PLC	
*4 indicate pigtail: 0=without 0.9mm pigtail, 1=with 0.9mm pigtail, 2=with 2.0mm pigtail, 3=with 3.0mm pigtail	
*5 indicate application: W=wall-mounting, P=pole-mounting	


Specification

Dimension(mm)	L260*W220*H80 (For Reference)
No. of inlet and outlet ports	1 in 2 out
The maximum capacity	24 fibers of 4 fibers LC adapter, or 12 fibers of duplex SC adapter

Environmental Data

Operation temperature	-25°C ~ +55°C
Storage temperature	-40°C ~ +70°C
2011/65/EC (RoHS)	Compliant

Product Image For Reference

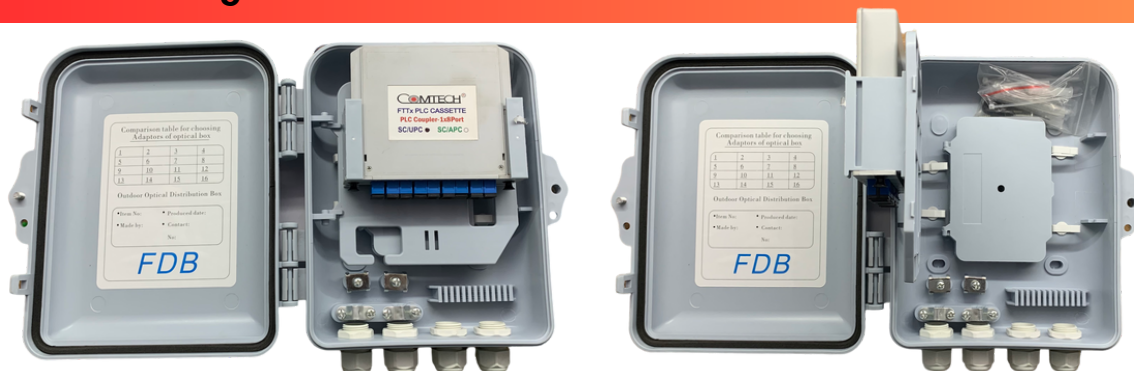

While the information has been carefully compiled to the of our knowledge , nothing is intended as representation or warranty on our part & no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products & services, we reserve the right to make changes in specification or other necessary product features or pricing.

