


# DC MULTI POWER NODE 3 IC 4 HIGH GAIN OUTPUT



- 3 IC CIRCUIT \*SEPERATE GAIN AND SLOPE CONTROL FOR EACH RF IC \* 4 OUP TUT ( 105dB)
- OPERRATES ON FORWARD/REVERSE 9-35 V DC
- RUNS ON 12V/7 AH BATTERY
- OPERATES ON 12V ADAPTER & ALSO THRU POWER OVER CABLE
- OPTICAL WAVE LENGTH : 1200-1600 nm
- BANDWIDTH : 47-860 MHz
- THREE IC
- OPTICAL SENSIVITY : +3 ~ -12 dBm
- DOUBLE OUTPUT WITH TEST POINT
- ALUMINIUM HOUSING WITH DUAL HEATSINK

**ND306**

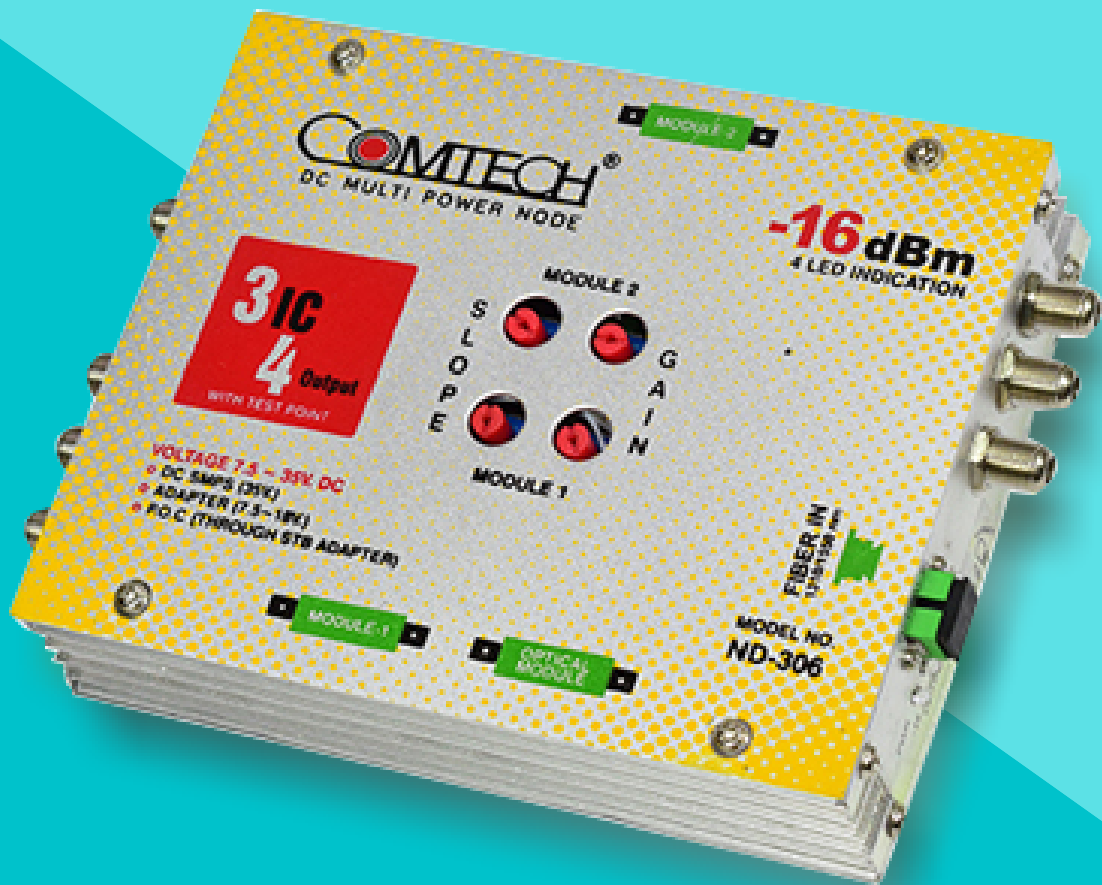